



# 慶泰樹脂



國際田徑協會認證



國際網球協會認證



正字標記



ISO 14001



環境管理認證



國家鑽石獎



ISO 9001



國際品質認證




台灣精品

\*耐久 \*耐藥 \*無縫 \*最高級潔淨的空間

\*Durable \*Anti-chemicals \*Seamless \*High Quality clean room

# EPOXY

## 工程用環氧塗料 for Engineer Paint

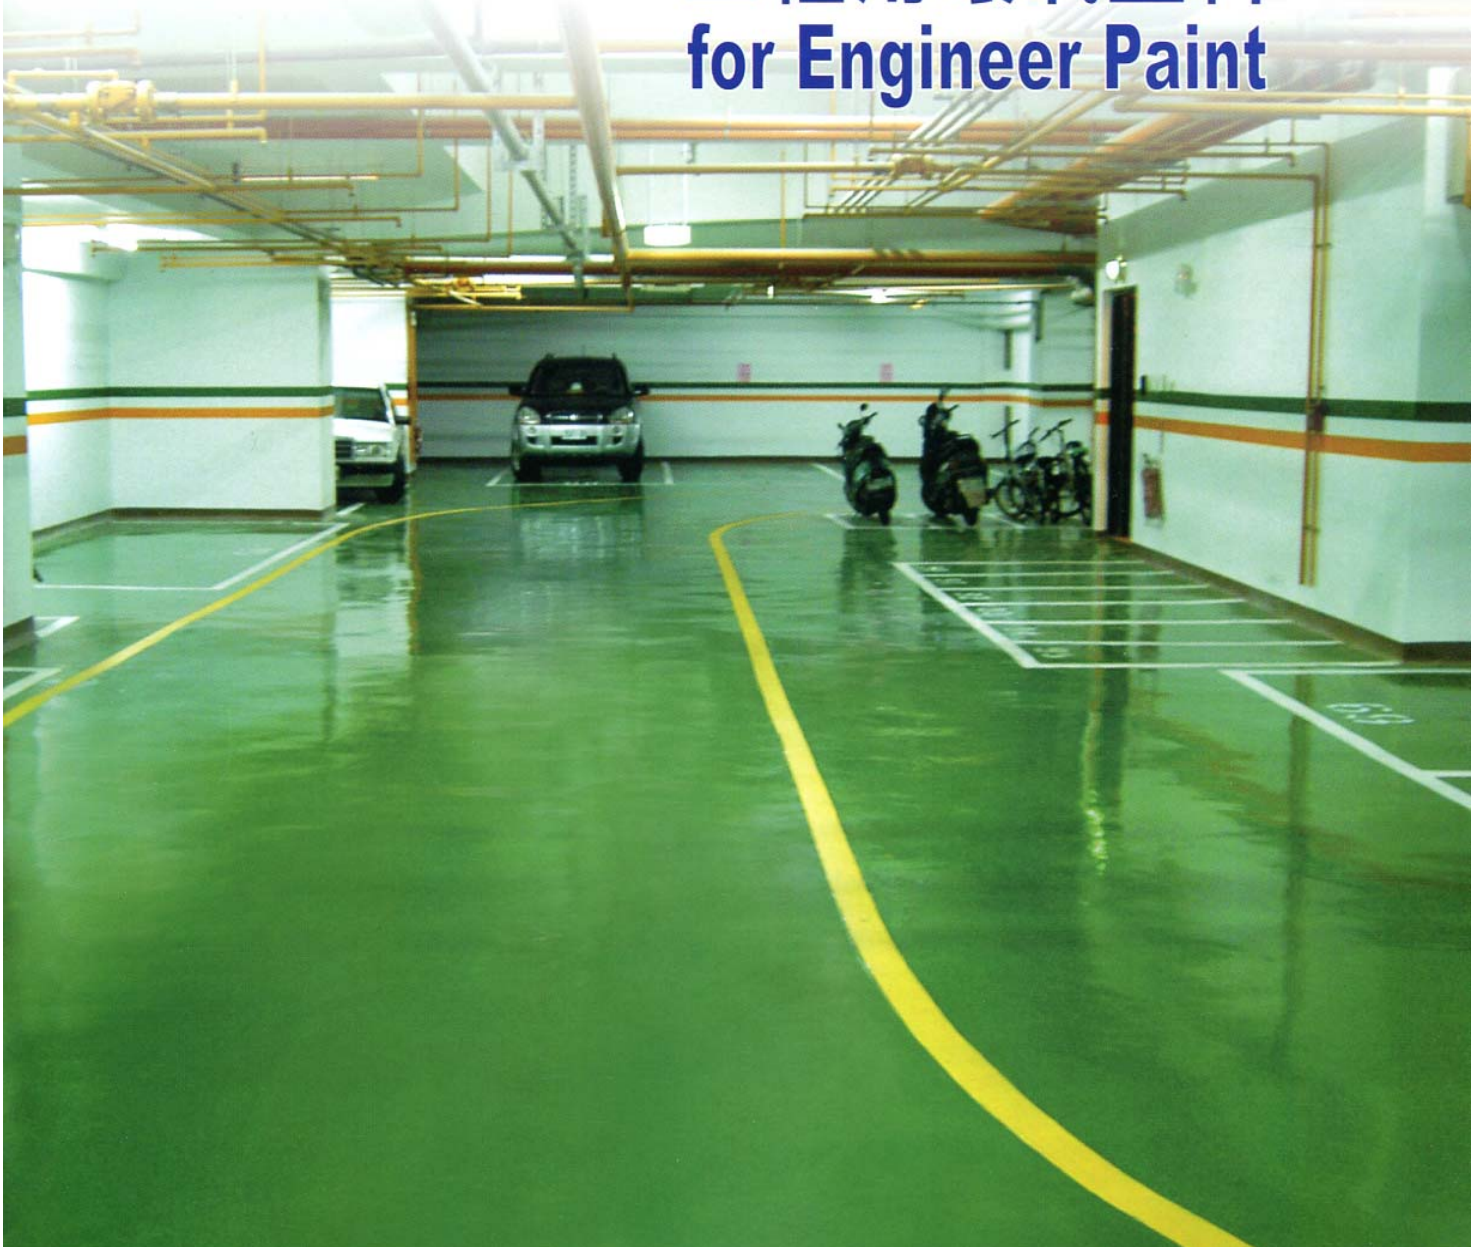

# EPOXY


## 工程用環氧塗料 for Engineer Paint

EPOXY 環氧地板塗料是最高級潔淨空間的建材，適用於高級住宅、辦公大樓、GMP 藥廠、食品廠、電子廠、醫院等場所之地板與壁面，也可用於特殊施工方法，在一般廠房、倉庫須耐壓、耐蝕的場所使用。

EPOXY resins flooring coating is especially suitable for the clean environment such as the floors and walls of GMP factories, office buildings, food factories, electronics components manufacture and hospitals. They also can be applied in general factories and warehouse where need such a heavy duty coating.


### 平塗法 Coating Method

適用於防蝕、防震、無縫之經濟型地板塗裝。  
Suitable for economic type seamless, anti-corrosion and dust-proof flooring coating.

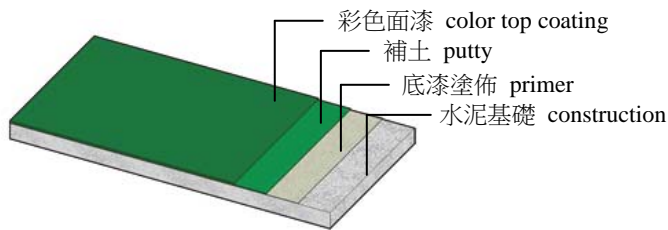


### 流展平塗法 Spreading Coating Method

適用於防塵、耐化學品、無縫之地板塗裝。  
Suitable for seamless chemical resistance and dust-proof flooring coating.

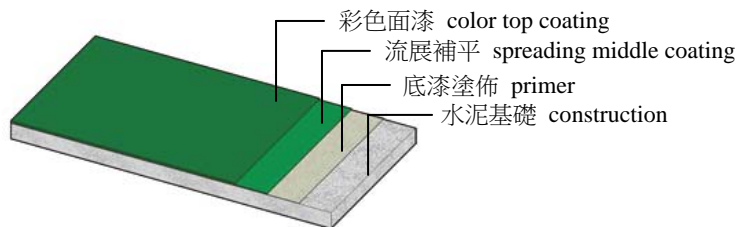


### 砂漿平塗法 Resin Mortar Coating Method

適用於耐壓、防塵之地板塗裝。  
Suitable for high loading and dust-proof flooring coating.

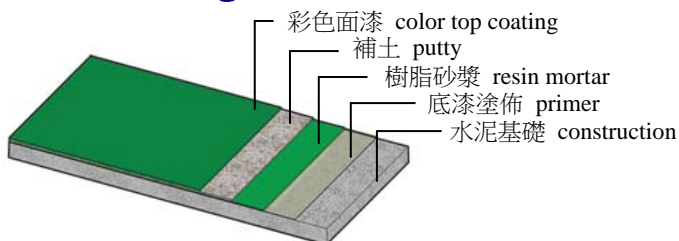


### 壁面平塗法 Wall Coating Method

適用於牆面、天花板、潔淨室、須防菌、防塵、防蝕、防水之地板塗裝。  
Suitable for painting wall, ceiling, cleanedroom So as to have the effect of bacteria-proof, Dust-proof anti-corrosion, and water-proof.

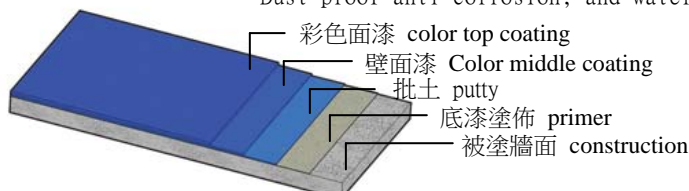


## 止滑法 Non-slip Method

適用於止滑、無縫之經濟型地板塗裝。  
Suitable for seamless and non-slip flooring coating.

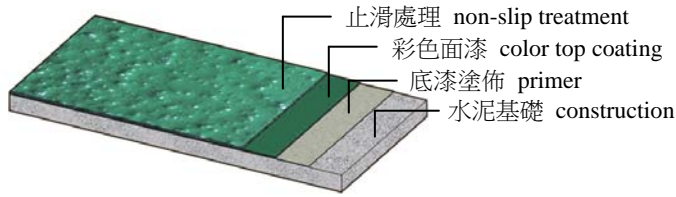


## 流展止滑法 Spreading Non-slip Coating Method

適用於止滑、耐化學品、無縫之地板塗裝。  
Suitable for seamless chemical resistance and non-slip flooring coating.

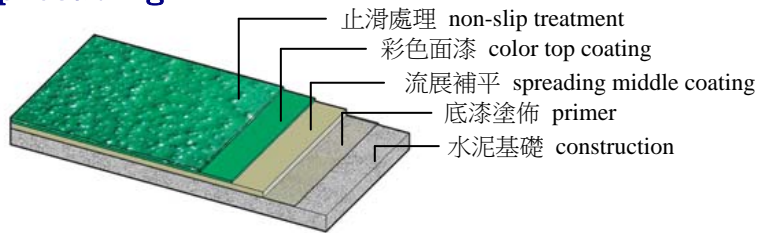


## 砂漿止滑法 Non-slip Mortar Method

適用於耐壓、耐磨之地板塗裝。  
Suitable for high loading and abrasion resistance flooring coating.

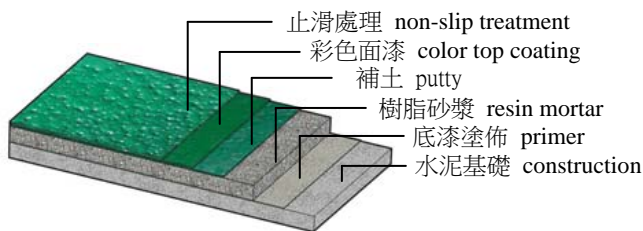


## 耐蝕積層法 Laminate Coating Method

適用於耐化學品、防水之儲槽塗裝。  
Suitable for the coating of chemical resistance and water proof storage tank.

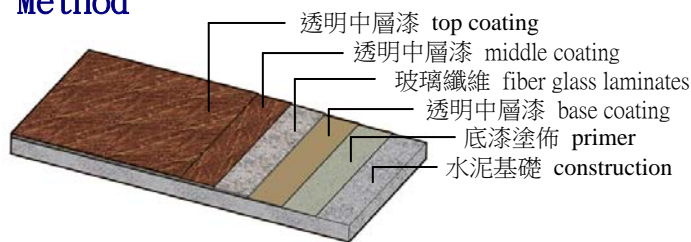

## 彩色積層法 Color Laminate Coating

適用於游泳池、儲水槽之塗裝。  
Suitable for the flooring coating of swimming pool and water storage tank.

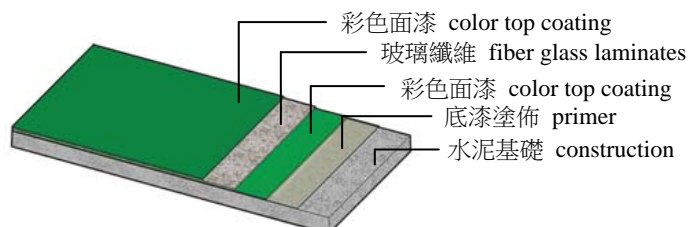



## 注意事項：Limitaion

- 1.底漆、面漆、稀釋劑及部份產品含有機溶劑，貯存與施工時請遠離火氣，以維安全。  
Keep away from sparks, open flame and other sources of ignition.
- 2.部份產品含有機溶劑及異味，在室內、地下室及貯槽等密閉場所施工，請注意換氣通風，以維安全。  
Provide adequate ventilation and use proper safety equipment during application.
- 3.施工中請配戴防護用具，如手套、護目鏡、防護面具或防塵口罩等，以維安全與健康。  
Wear protective equipments when mixing or using to keep safety.
- 4.素地未乾、陰雨，相對濕度 85%以上時，避免施工。  
Do not apply when surface is over damp, rain is imminent or RH is above 85%.
- 5.含主劑、硬化劑之產品必須依規定比例調勻施工。  
Thoroughly mix Component A and Component B according to mix ratio recommendations.
- 6.請參照施工說明書之指導使用，以確保品質。  
Refer to the operation guideline to guarantees the quality.
- 7.地坪有化學酸鹼液影響時彩色面漆上應加透明保護材。  
The substrate should be coated by clear paintings to avoid the influence of acid and alkali.

## 工 程 實 例

### Reference

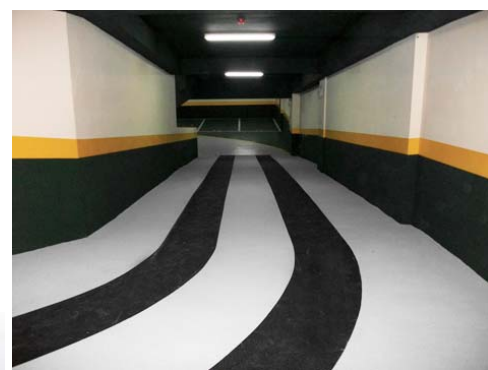

 慶泰樹脂化學股份有限公司

總公司：台中市大甲區日南幼獅工業區工二路 50 號  
洽詢專線：TEL：04-26816835-9 FAX：04-26811361

網址：<http://www.chingtai-resins.com.tw>

E-MAIL：[service@chingtai-resins.com.tw](mailto:service@chingtai-resins.com.tw)

台北營業所：TEL：02-22392356 FAX：02-22392357

高雄營業所：TEL：07-7497891 FAX：07-7497893